


# M5 Series

[www.fluorel.co.uk/products/surface.htm](http://www.fluorel.co.uk/products/surface.htm)

**M5  
Series**



11/11

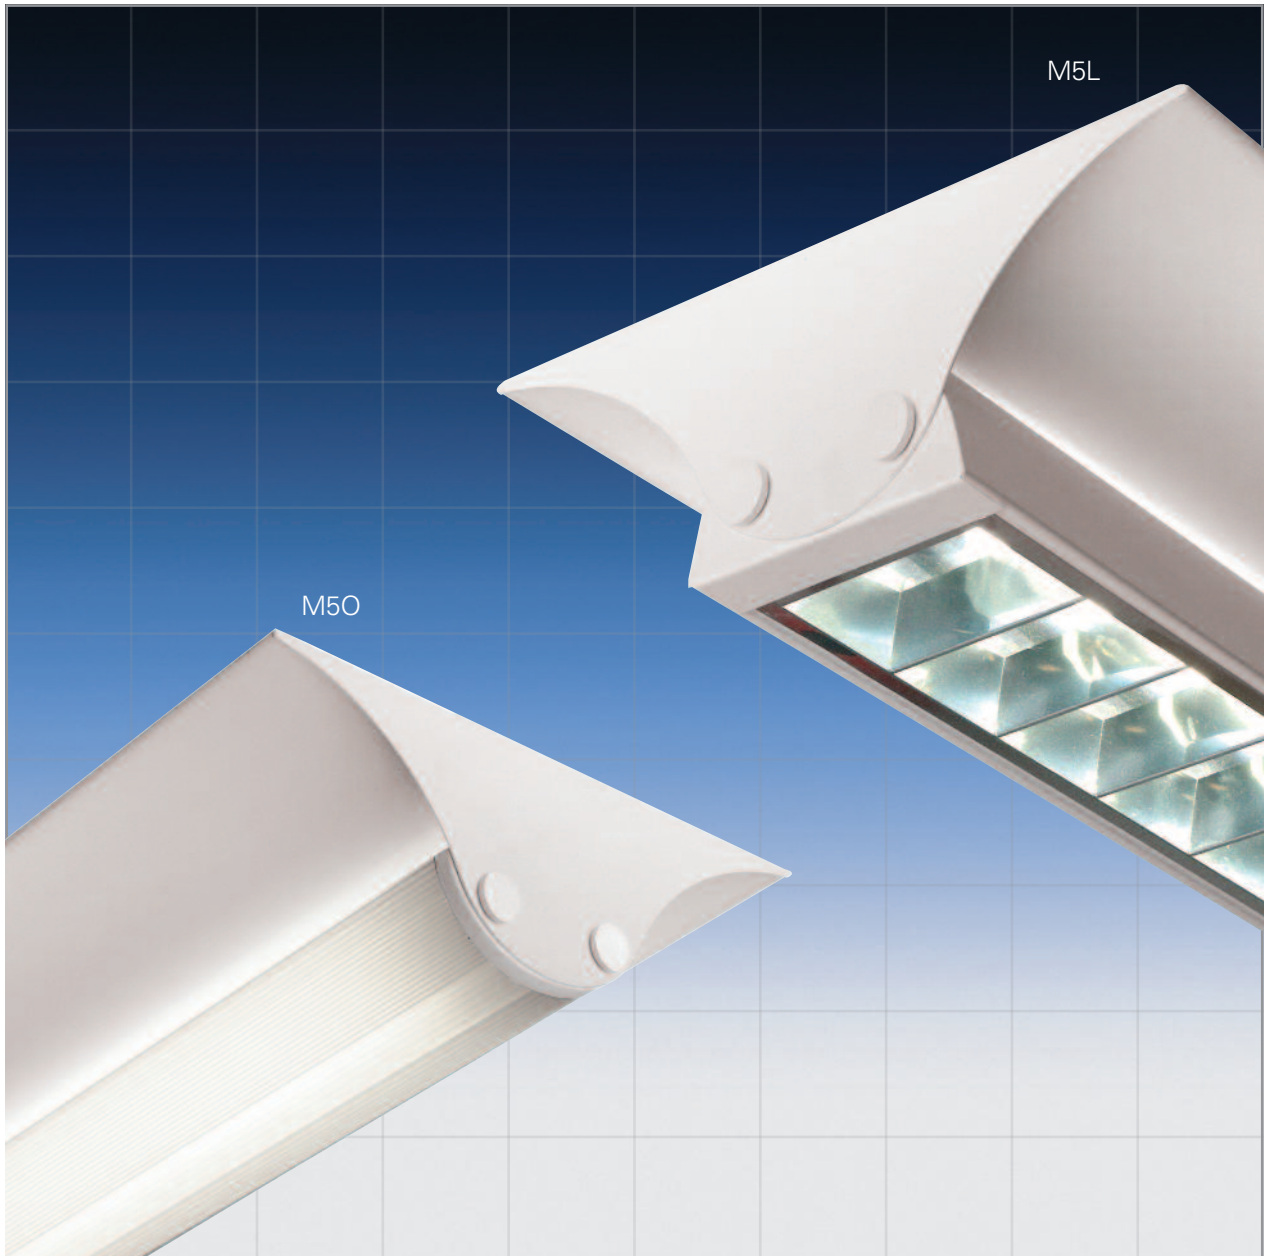

- Shallow surface direct/indirect luminaire
- T5 single or twin lamp options
- Aids designers to achieve LG7 compliance
- Integral emergency options
- Dimmable options
- Various controller options
- Excellent optical efficiency - up to 95% LOR
- Supplied with lamps

**Fluorel**Lighting  
Lighting for a brighter future


**Fluorel Lighting is a leading supplier  
of innovative energy efficient lighting**

Surface mounted direct / indirect linear luminaire with low glare wedge louvre controller to give well controlled downward light component with defined cut-off. Provides significant ceiling and side light distribution aiding LG7 compliance.

## M5L



M5L	lamp type
M5L128L	1 x 28w T5
M5L228L	2 x 28w T5
M5L154L	1 x 54w T5
M5L254L	2 x 54w T5
M5L135L	1 x 35w T5
M5L235L	2 x 35w T5
M5L149L	1 x 49w T5
M5L249L	2 x 49w T5
M5L180L	1 x 80w T5
M5L280L	2 x 80w T5

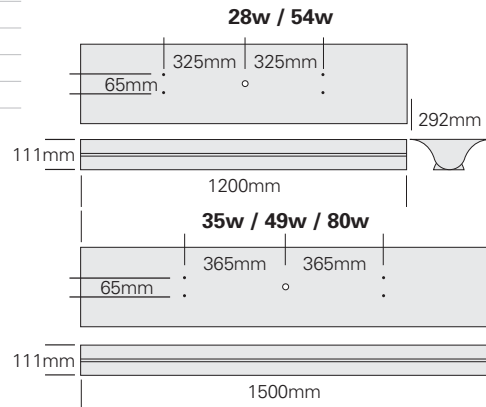


### Dimming and Emergency Lighting options


Digital dimming versions available – replace the last “L” in the required part number with “DDL” e.g. M5L280DDL.  
Integral emergency conversions are available for all sizes shown. Add suffix /EMG for 3hr duration and suffix /STEMG for self test option. STEMG not available in 80w.

Surface mounted direct/indirect luminaire with white perforated steel mesh gondola giving mellow diffused downwards light whilst still providing ceiling and wall illumination.

## M5M

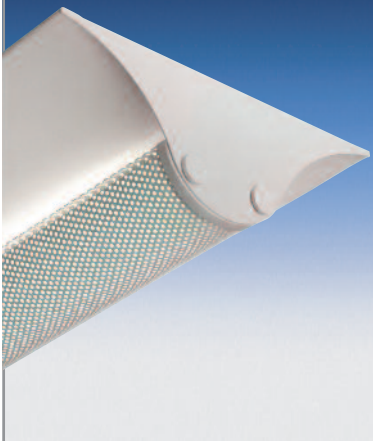

M5M	lamp type
M5M128L	1 x 28w T5
M5M228L	2 x 28w T5
M5M154L	1 x 54w T5
M5M254L	2 x 54w T5
M5M135L	1 x 35w T5
M5M235L	2 x 35w T5
M5M149L	1 x 49w T5
M5M249L	2 x 49w T5
M5M180L	1 x 80w T5
M5M280L	2 x 80w T5

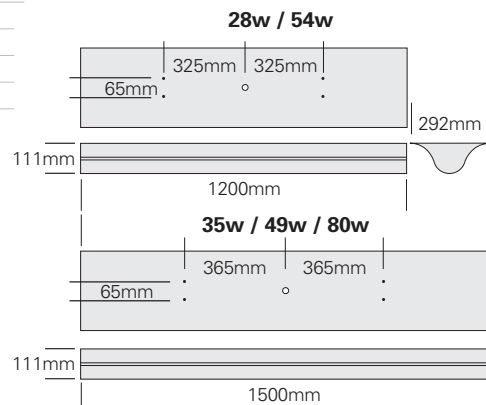

### Dimming and Emergency Lighting options


Digital dimming versions available – replace the last “L” in the required part number with “DDL” e.g. M5M280DDL.  
Integral emergency conversions are available for all sizes shown. Add suffix /EMG for 3hr duration and suffix /STEMG for self test option. STEMG not available in 80w.

Surface mounted direct / indirect linear luminaire with frosted polycarbonate extruded diffuser offering even light transmission with feature lighting appearance while still providing ceiling and side light distribution.

## M5O



M5O	lamp type
M5O128L	1 x 28w T5
M5O228L	2 x 28w T5
M5O154L	1 x 54w T5
M5O254L	2 x 54w T5
M5O135L	1 x 35w T5
M5O235L	2 x 35w T5
M5O149L	1 x 49w T5
M5O249L	2 x 49w T5
M5O180L	1 x 80w T5
M5O280L	2 x 80w T5

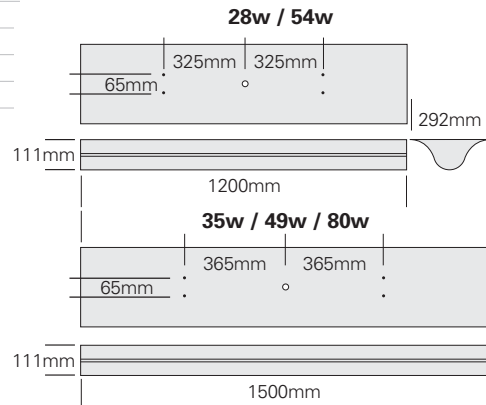


### Dimming and Emergency Lighting options


Digital dimming versions available – replace the last “L” in the required part number with “DDL” e.g. M5O280DDL.  
Integral emergency conversions are available for all sizes shown. Add suffix /EMG for 3hr duration and suffix /STEMG for self test option. STEMG not available in 80w.

Surface mounted direct / indirect linear luminaire with clear polycarbonate extruded diffuser with internal prisms to provide controlled low glare cut-off appearance with excellent light transmission whilst still providing ceiling and side lighting.

## M5C

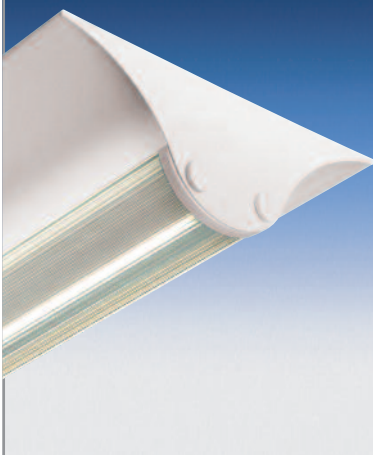

M5M	lamp type
M5C128L	1 x 28w T5
M5C228L	2 x 28w T5
M5C154L	1 x 54w T5
M5C254L	2 x 54w T5
M5C135L	1 x 35w T5
M5C235L	2 x 35w T5
M5C149L	1 x 49w T5
M5C249L	2 x 49w T5
M5C180L	1 x 80w T5
M5C280L	2 x 80w T5

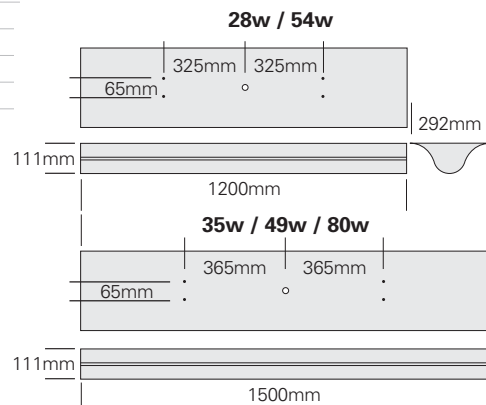


### Dimming and Emergency Lighting options

Digital dimming versions available – replace the last “L” in the required part number with “DDL” e.g. M5C280DDL.  
Integral emergency conversions are available for all sizes shown. Add suffix /EMG for 3hr duration and suffix /STEMG for self test option. STEMG not available in 80w.

# M5 Series

[www.fluorel.co.uk/products/surface.htm](http://www.fluorel.co.uk/products/surface.htm)

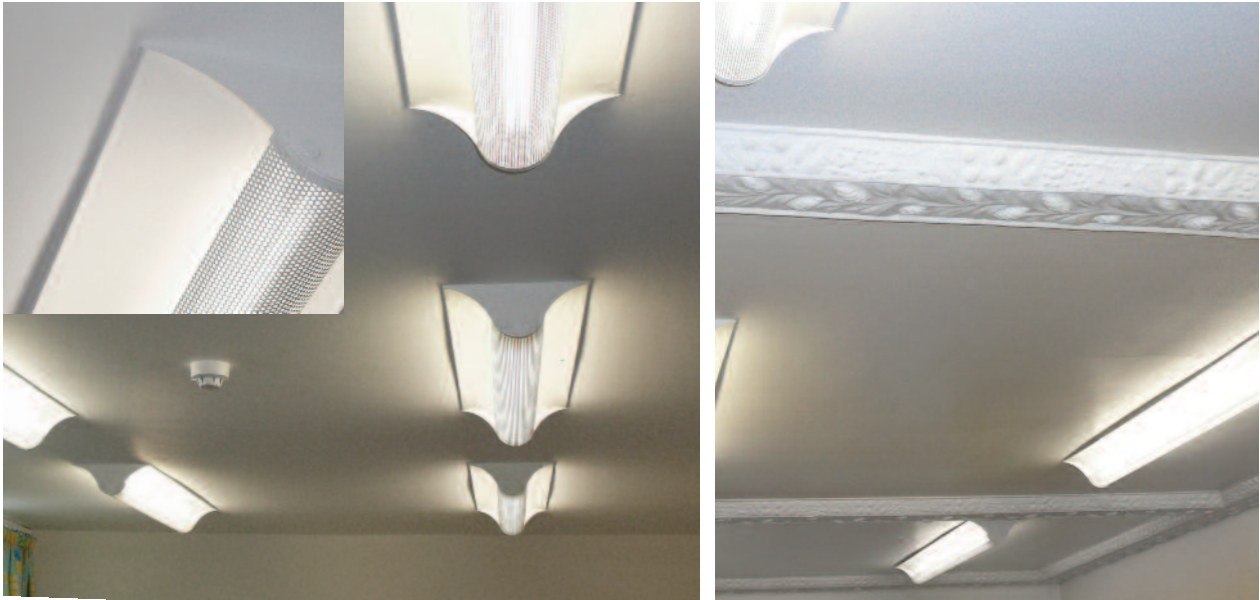

## M5 Series highlights

- 1200mm and 1500mm nominal lengths. Lengths to suit shorter T5 lamps can be manufactured to special order. Contact Fluorel sales department.
- Single or twin lamp configuration in the same body profile
- Integral emergency conversion of 1200mm and 1500mm lengths. Remote mounting for shorter lengths
- Self test available
- A ceiling spacer skirt is available where installation is required over surface conduit or junction boxes.  
Order separately - 1200mm length part number SCM512  
1500mm length part number SCM515
- Outstanding optical performance - up to 95% LOR
- Aids designers comply with LG7 requirements
- Supplied with lamps

**Fluorel Lighting Limited**  
Designers and manufacturers  
of lighting fittings

Unit 3, 2-8 Roebuck Road,  
Hainault, Essex IG6 3UE.  
Tel +44(0)8458 643 643 Fax +44(0)20 8506 1792  
[info@fluorel.co.uk](mailto:info@fluorel.co.uk) [www.fluorel.co.uk](http://www.fluorel.co.uk)

**Fluorel**Lighting  
Lighting for a brighter future

Fluorel Lighting Limited has a policy of continuous development and in the interest of clients, reserves the right to change specifications or design and to supply products which may differ from those described and illustrated without notice and without liability.

**T5 WattMiser**<sup>™</sup>